

JNC


J. Negre C., S.L.

Soluciones desde 1991

RECUPERADORES GAS-GAS A PLAQUES



Customer Segments



JNC
J. Negre C., S.L.
Soluciones desde 1991

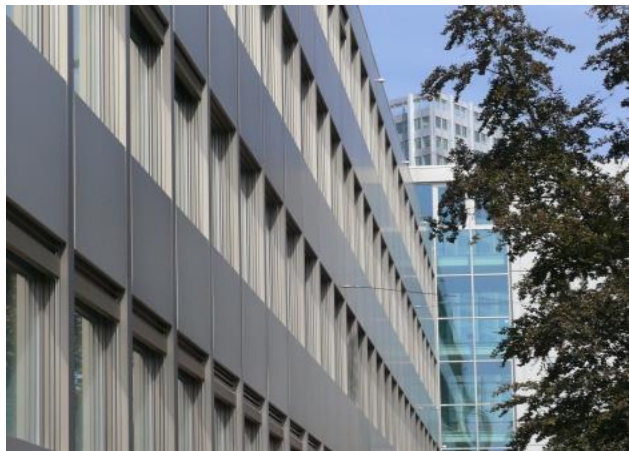



Plate exchanger for comfort ventilation



Products for industrial or corrosive applications



Industrial and corrosive applications



JNC

J. Negre C., S.L.

Soluciones desde 1991


As a rule, significantly higher savings potential due to:



- Reduction of fresh energy consumption
- Conversion of process waste heat
- Reduction of CO2 emissions




Product types overview

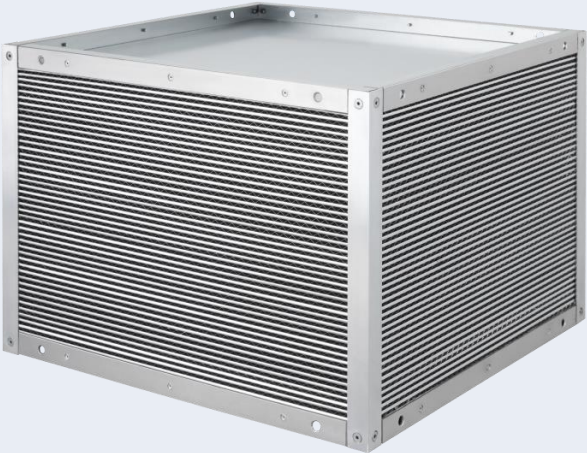sealed		welded
slide-in	frame-type	case-type
		
aluminum or stainless-steel		stainless-steel
up to 150/600 °C		up to 800 °C



sealed plate exchangers




JNC
J. Negre C., S.L.
Soluciones desde 1991

optional: hole pattern, rivet-nuts



sealed plate exchangers




JNC
J. Negre C., S.L.
 Soluciones desde 1991




aluminum	stainless-steel
up to 150 °C	up to 600 °C
slide-in or frame-type	
PU, silicone or solvent-based sealing	PU, silicone, solvent-based or ceramic sealing
optional extra sealing up to 0.5% leakage	
individual corrugated and separator layer	
max. differential pressure 10'000 PA	
individual fin spacing for supply- and exhaust-air	
scalable from 200x200 up to 2800x2800 mm, selectable width 150-5500 mm	
100-250'000 kg/h massflow	
up to 88% dry efficiency	




scalable



JNC
J. Negre C., S.L.
Soluciones desde 1991

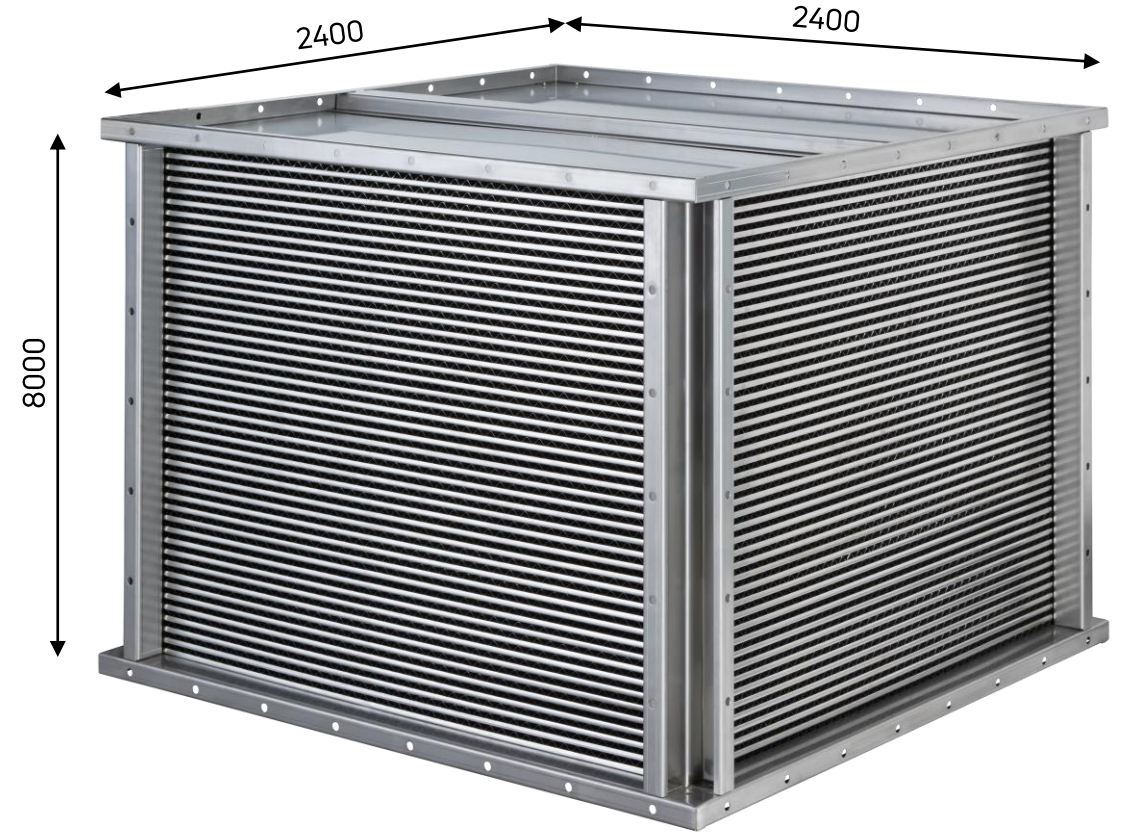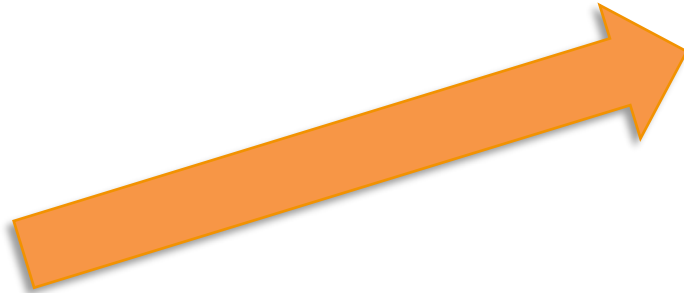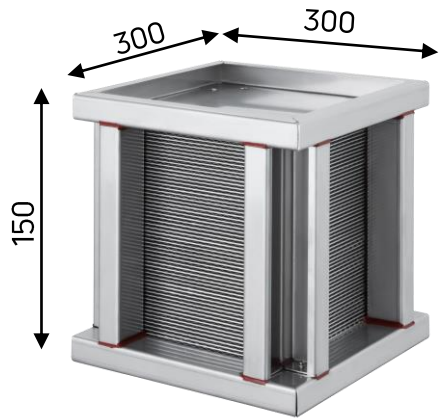


individual fin spacing




JNC

J. Negre C., S.L.

Soluciones desde 1991

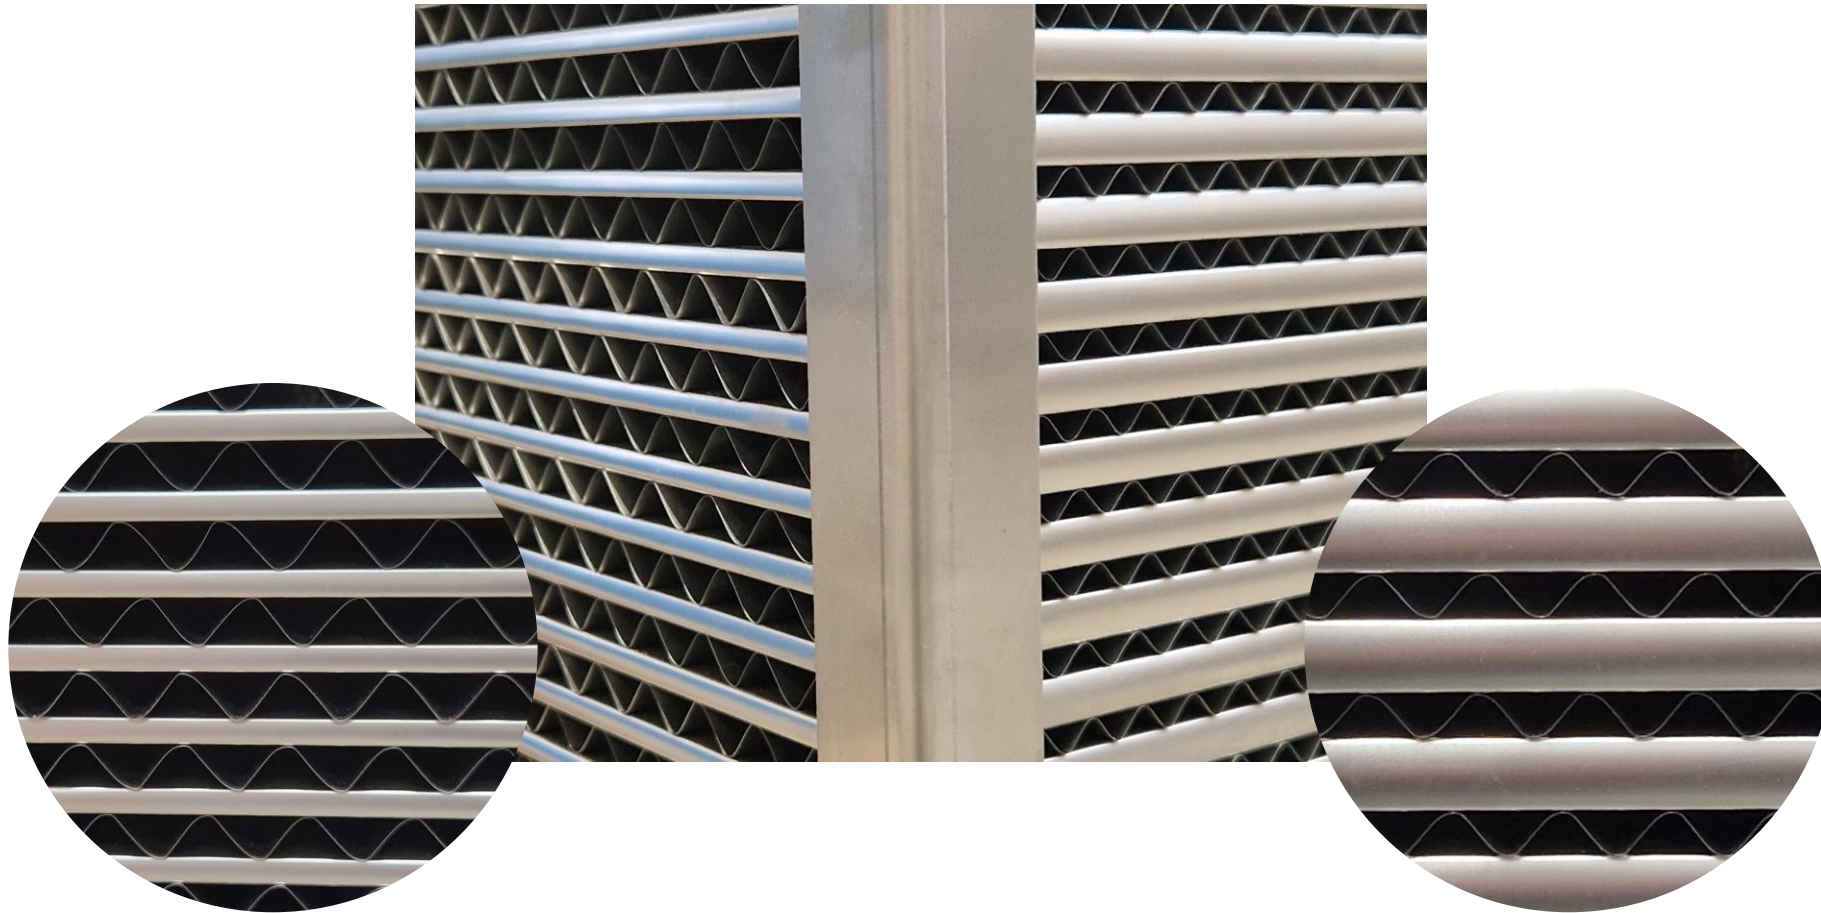

welded plate exchanger



JNC
J. Negre C., S.L.
Soluciones desde 1991



stainless-steel

fully welded casing

sealant-free

separator sheet 0.5 mm

corrugated sheet 0.1 mm spot welded

casing sheets 1.0 mm

max. differential pressure 50'000 PA

individual fin spacing for supply- and exhaust-air


240x240 up to 1200x1200 mm plate square

150-1500 mm usable width




100-35'000 kg/h

up to 81% dry effectiveness

Use cases



JNC
J. Negre C., S.L.
Soluciones desde 1991

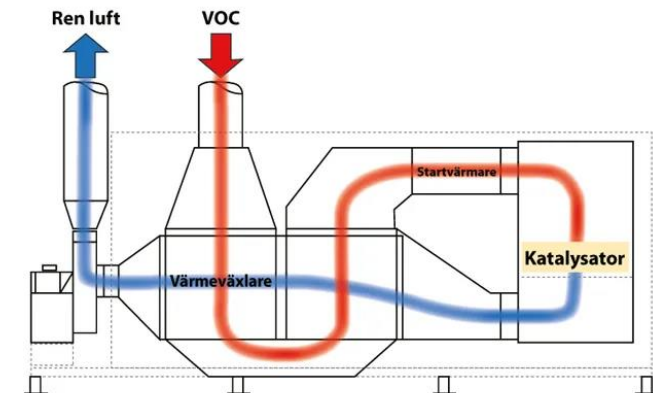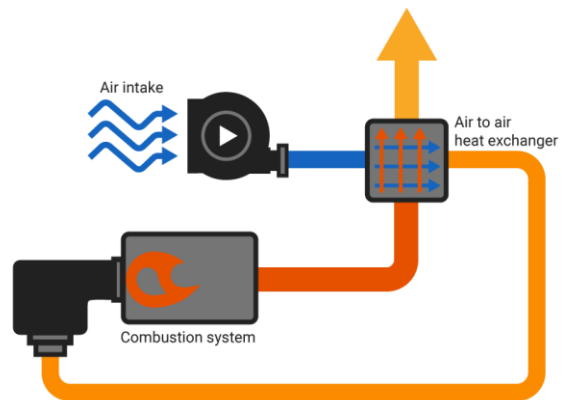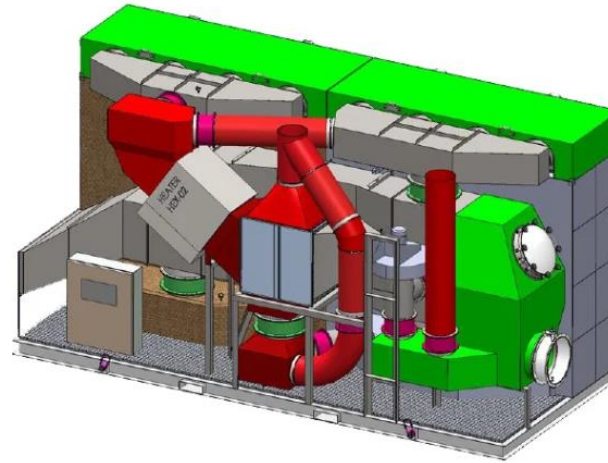

Enablers/disablers

disablers:

1. liquid medias
2. pressure over ambient
3. transport of heat energy

enablers:

1. exhaust temperatures $>180\text{ }^{\circ}\text{C}$
2. Volume flows of 200-50'000 m³/h
3. Individual dimensions
4. direct mount flange
5. gastight or sealant-free
6. numerable energy costs/savings



Dimensioning software Winpoly

Winpoly.Net V9.3.2.0 - Cross-flow heat exchanger

SI IP Customer: <Select customer> Device calculation: English

In

	Case 1		Case 2	
	Supply	Exhaust	Supply	Exhaust
Nominal volume [m³/h]	4250	4250	4250	4250
Temperature [°C]	-12.0	20.0	32.0	20.0
Relative humidity [%]	90.0	40.0	40.0	40.0
Absolute humidity [g/kg]	1.20	5.79	11.89	5.79
Enthalpy [kJ/kg]	-9.1	34.8	62.6	34.8

Out

Eff. volume [m³/h]	4071	3997	4336	4356
Mass flow [kg/h]	5100	5100	5100	5100
Density [kg/m³]	1.25	1.28	1.18	1.17
Temperature [°C]	8.3	2.7	24.8	27.2
Relative humidity [%]	17.8	100.0	60.6	25.9
Absolute humidity [g/kg]	1.20	4.58	11.89	5.79
Enthalpy [kJ/kg]	11.4	14.3	55.2	42.1

Result

	1253/2014: 60.1%	EN13053: 58.0% H5
Sens. effectiveness dry [%]	59.9	60.3
Sens. effectiveness wet [%]	63.6	60.3
Temp. efficiency dry [%]	59.9	60.3
Temp. efficiency wet [%]	63.6	60.3
Recuperation power [kW]	29.0	-10.3
EATR [%] / OACF	0.0 / 1.00	0.0 / 1.00
Pressure drop increase [%]	0.0 (0 Pa)	0.0 (0 Pa)
Std. pressure drop [Pa]	154	154
Face velocity [m/s]	1.86	2.09
Condensate [l/h]	0.0	6.2

Notes: Condensation! Start of freezing at -7.1°C

Project

Customer: Project: Description: Details...

Product

Cross-flow heat exchanger

Environment

Level [m]: 0 Pressure diff. Δp_{2-1} [Pa]: 0 Pressure [hPa]: 1013.25

Construction

Bloc material: Stainless Steel 316Ti Case type: Flange type Bypass: Bypass.. Layout: Plates vertically

Sealing max. 90°C: Sealing max. 90°C Casing material: Stainless steel 304 Hole pattern: without

☐ Extra sealant

Type

Search... Plate length: 06 Width [mm]: 1000 Fin spacing (exh. air): 15 - 3.0mm Series: AN CA

Fin spacing (sup. air): 15 - 3.0mm

N1515.060940-E2

Length (A1): 700 mm Weight: 233 kg Price: ---

Height (A2): 700 mm F: 73 mm


Width (B): 1000 mm M: 30 mm

Fin spacing ETA: 3.0 mm N: 43 mm

Fin spacing SUP: 3.0 mm

Flange width (E): 30 mm

Active width: 940 mm

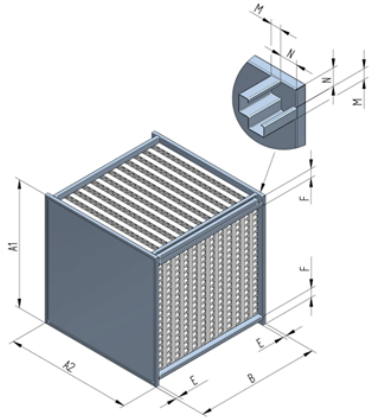

Specific project enquiries

In order to make an estimate or even an interpretation, we need certain information:

Exhaust air: volume flow (Nm³/h or kg/h), temperature, possibly humidity if < 100 °C

Supply air: volume flow (Nm³/h or kg/h), temperature, possibly humidity if exhaust air <100 °C

Target efficiency OR target temperature of supply air

if possible, estimation of the possible dimensions

if possible, max. acceptable pressure drop

J. Negre C., S.L.


C/ París,1-7, Nave 28

08191 Rubí (Barcelona)

Tf. 93 588 08 18 – Fax 93 588 61 62

vendes@jnegre.com

www.jnegre.com



JNC

J. Negre C., S.L.

Soluciones desde 1991

